


## HVC-D10 安装尺寸/Mounting Dimension

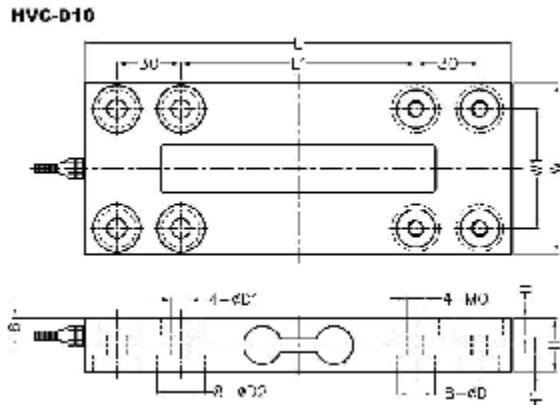


额定载荷 (kg)	H	H1	M0	D	D1	D2	L	L1	W	W1
50-100	25	8	M18	Φ18	Φ9	Φ18	200	110	80	56
150	27	8	M10	Φ18	Φ11	Φ27	220	126	98	66
300	31	8	M10	Φ18	Φ11	Φ27	220	126	98	66
500	36	8	M10	Φ18	Φ11	Φ27	220	126	98	66
1000-2000	47	10	M12	Φ22	Φ13	Φ27	220	126	98	66

参数	Specifications	技术指标/Technique
额定容量	Capacity	20,50kg
精度等级	Accuracy class	C3
输出灵敏度	Rated output	2.0±10% mV/V
零点输出	Zero balance	±0.2% F.S.
非线性	Non-linearity	0.03% F.S.
滞后	Hysteresis	0.03% F.S.
重复性	Repeatability	0.03% F.S.
蠕变 (30min)	Creep (30min)	0.03% F.S.
温度灵敏度漂移	Temp. effect on output	0.02% F.S./10°C
零点温度漂移	Temp. effect on zero	0.02% F.S./10°C
输入电阻	Input impedance	1106 ± 10Ω
输出电阻	Output impedance	960 ± 50Ω
绝缘电阻	Insulation	≥5000MΩ/100VDC
激励电压	Recommended excitation	5~10V
最大激励电压	Maximum excitation	15V
温度补偿范围	Compensated temp range	-10~40°C
工作温度范围	Operation temp range	-20~60°C
安全超载	Safe overload	200% F.S.
极限超载	Ultimate overload	300% F.S.
电缆线尺寸	Cable size	Φ6×3000mm
单件重量	Weight approx.	0.5kg
材料	Material	Alloy Steel(合金钢)
防护等级	IP Class	IP65
最大秤盘尺寸	Max. platform size	400mm × 400mm

## 特点与用途/Features & Applications

- l 合金钢材料
- l 精度高、抗偏载能力强
- l 容易安装, IP65
- l 适用于电子秤、计数秤、电子天平及工业称重系统
- l Made of Alloy Steel.
- l High accuracy, high side load tolerance
- l Easy to install, IP65 protection
- l Mainly used for electronic scales, electronic balance, price computing scales and industrial weighing systems

## 受力方式/Load Direction

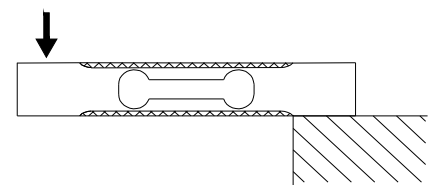

## 配线图/Wiring Code

